


## Current Sensor

---

Product Series: SHK-VBS-TH-S3

Part number: SHK-VBS-TH-900-S3

Version: V1.1

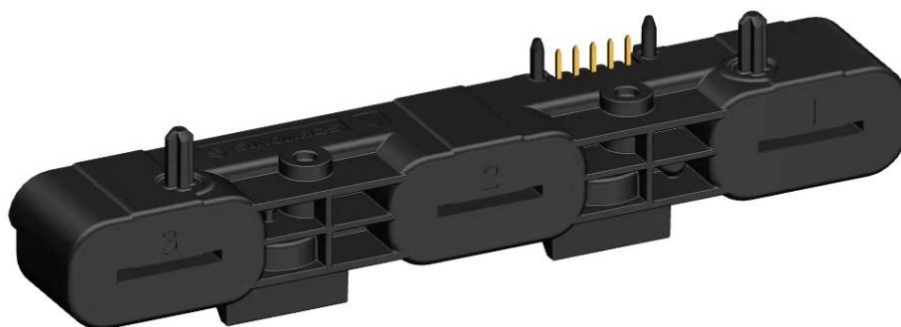

Sinomags Technology Co., Ltd

Web site: [www.sinomags.com](http://www.sinomags.com)

## CONTENT

|    |                                         |   |
|----|-----------------------------------------|---|
| 1. | Description .....                       | 2 |
| 2. | Electrical data SHK-VBS-TH-900-S3 ..... | 3 |
| 3. | Product definition statement .....      | 4 |
| 4. | Electrical circuit diagram .....        | 4 |
| 5. | Dimension & Pin definitions .....       | 5 |
| 6. | Environmental test .....                | 6 |
| 7. | Important notice .....                  | 7 |

## 1. Description

The SHK-VBS-TH current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

### Typical applications

- Electrical Power Steering
- Motor drive application
- Converters
- Battery Management

### General parameter

| Parameter           | Symbol    | Unit | Value     |
|---------------------|-----------|------|-----------|
| Working temperature | $T_a$     | °C   | -40 ~ 125 |
| Storage temperature | $T_{stg}$ | °C   | -40 ~ 125 |
| Mass                | m         | g    | 72        |

### Absolute maximum rating

| Parameter                       | Symbol    | Unit | Value                        |
|---------------------------------|-----------|------|------------------------------|
| Supply voltage                  | $V_{cc}$  | V    | -0.3 ~ 10<br>(Not operating) |
|                                 |           |      | 6.5                          |
| Electrostatic discharge voltage | $U_{ESD}$ | kV   | 8<br>(HBM)                   |

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

### Isolation parameter

| Parameter                      | Symbol   | Unit | Value                 | Comment                            |
|--------------------------------|----------|------|-----------------------|------------------------------------|
| Insulation voltage             | $U_d$    | kV   | 2.8                   | RMS voltage for AC test 50Hz/1 min |
| Insulation resistance          | $R_{is}$ | MΩ   | 500                   | DC 1kV/1 min                       |
| Clearance distance (pri. -sec) | $d_{cl}$ | mm   | 9                     | Shortest distance through air      |
| Creepage distance (pri. -sec)  | $d_{cp}$ | mm   | 9                     | Shortest path along device body    |
| Comparative tracking index     | CTI      | V    | 600                   | IEC60112                           |
| Case material                  |          |      | V0 according to UL 94 |                                    |


### Selection Guide

| Product           | Nominal current | Measuring range |
|-------------------|-----------------|-----------------|
| SHK-VBS-TH-900-S3 | 900 A           | 900 A           |


## 2. Electrical data SHK-VBS-TH-900-S3

| Parameter                                             | Symbol       | Unit                 | Min                                          | Typ        | Max  | Comment                                                                      |
|-------------------------------------------------------|--------------|----------------------|----------------------------------------------|------------|------|------------------------------------------------------------------------------|
| Primary current measuring range                       | $I_{PM}$     | A                    | -900                                         |            | 900  | SHK-VBS-TH-900-S3                                                            |
| Supply voltage                                        | $V_{CC}$     | V                    | 4.75                                         | 5          | 5.25 |                                                                              |
| Current consumption                                   | $I_{CC}$     | mA                   |                                              | 40         | 50   | @ $V_{CC} = 5.0\text{ V}$                                                    |
| Output voltage                                        | $V_{OUT}$    | V                    | $(V_{CC}/5) \times (V_{off} + G \times I_P)$ |            |      | @ $T_a = 25^\circ\text{C}$                                                   |
| Quiescent voltage                                     | $V_{off}$    | V                    |                                              | 2.5        |      | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}$                            |
| Sensitivity                                           | $G$          | mV/A                 |                                              | 2.22       |      | SHK-VBS-TH-900-S3                                                            |
| Load resistance                                       | $R_L$        | k $\Omega$           | 10                                           |            | 100  |                                                                              |
| Ratiometricity error                                  | $\epsilon_r$ | %                    |                                              | $\pm 0.5$  |      | @ $4.75\text{ V} \leq V_{CC} \leq 5.25\text{ V}$                             |
| Sensitivity error                                     | $\epsilon_G$ | %                    |                                              | $\pm 1$    |      | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}$                            |
| Electrical offset voltage error                       | $V_{OE}$     | mV                   | -20                                          | $\pm 10$   | 20   | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}$                            |
| Magnetic offset voltage error                         | $V_{OM}$     | mV                   |                                              | $\pm 5$    |      | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}$ , after $\pm I_{PM}$       |
| Ave. Temp. coefficient of $V_{OE}$                    | $TCV_{OEAV}$ | mV/ $^\circ\text{C}$ |                                              | $\pm 0.15$ |      | @ $-40^\circ\text{C} \leq T_a \leq 125^\circ\text{C}$                        |
| Ave. Temp. coefficient of $G$                         | $TCG_{AV}$   | %/ $^\circ\text{C}$  |                                              | $\pm 0.03$ |      | @ $-40^\circ\text{C} \leq T_a \leq 125^\circ\text{C}$                        |
| Linearity                                             | $\epsilon_L$ | %                    |                                              | $\pm 1$    |      | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}, I = I_{PM}$                |
| Accuracy @ $25^\circ\text{C}$                         | $E_{TOT}$    | % of $I_{PM}$        | -1                                           |            | 1    | @ $T_a = 25^\circ\text{C}, V_{CC} = 5.0\text{ V}$                            |
| Accuracy @ $-40^\circ\text{C} \sim 125^\circ\text{C}$ | $E_{TOT}$    | % of $I_{PM}$        | -3.5                                         |            | 3.5  | @ $-40^\circ\text{C} \leq T_a \leq 125^\circ\text{C}, V_{CC} = 5.0\text{ V}$ |
| Response time                                         | $T_r$        | $\mu\text{s}$        |                                              | 2          | 6    | @ 90% of $I_{PM}$                                                            |
| Frequency bandwidth (-3 dB)                           | BW           | kHz                  |                                              | 40         |      | No RC circuit                                                                |
| Output voltage noise                                  | $V_{no}$     | mVpp                 |                                              | 20         |      | @ DC ~ 10 kHz                                                                |

### 3. Product definition statement

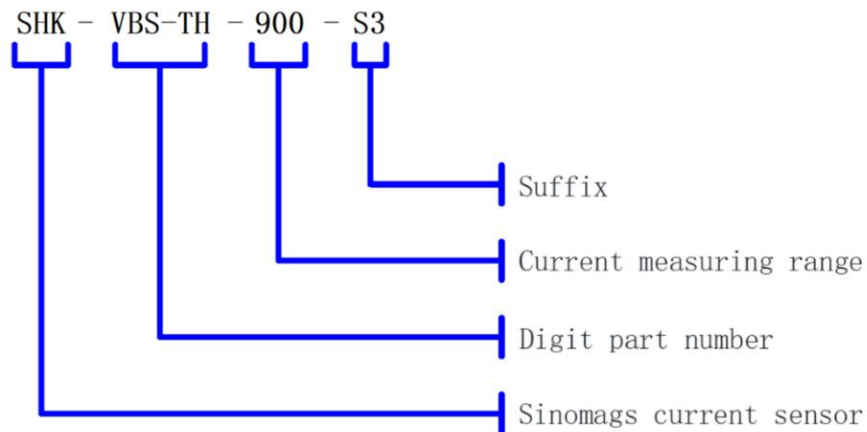

### 4. Electrical circuit diagram

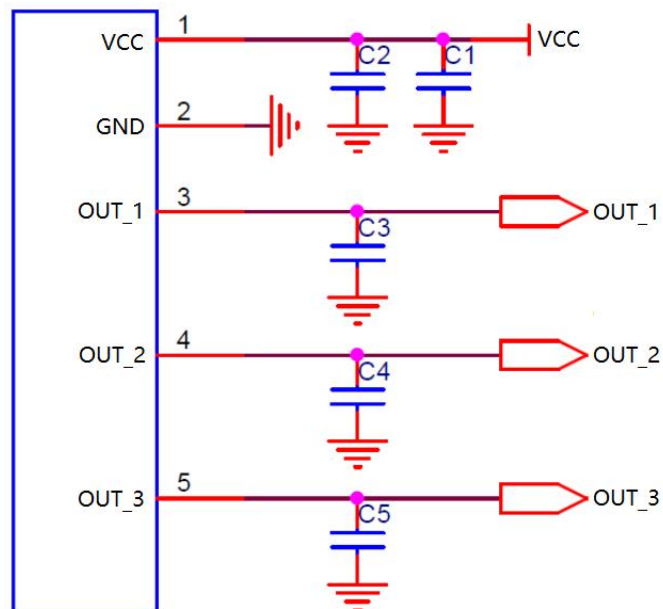

Remarks:


Capacitor recommended specification:

|          |       |
|----------|-------|
| C1       | 1uF   |
| C2       | 100nF |
| C3、C4、C5 | 1nF   |

[illegible]

**Remarks:**

- 1、The clearance distance and creepage distance of the product are related to the high-voltage layout.
- 2、High voltage signal cannot be placed 7mm around the metal fixing plate.

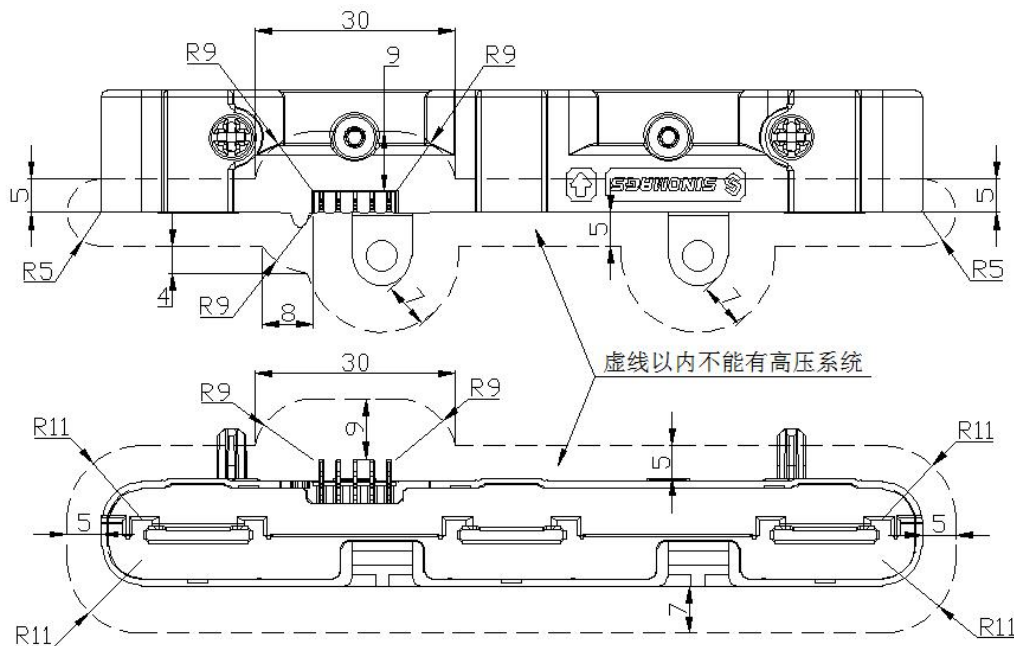

## 6. Environmental test

| Name                                | Test condition            |
|-------------------------------------|---------------------------|
| <b>Electrical tests</b>             |                           |
| Humidity test                       | 85℃/85%,1000hr            |
| Thermal shock                       | -40℃/125℃, 1000cycles     |
| High temperature test               | 125℃, 1000hr              |
| Low temperature test                | -40℃, 1000hr              |
| Insulation voltage                  | 2800 V, AC/50Hz/1min      |
| Insulation resistance               | 1000 V, DC/1min           |
| <b>Mechanical tests</b>             |                           |
| Shocks                              | ISO16750-3                |
| Vibration test                      | ISO16750-3                |
| <b>EMC tests</b>                    |                           |
| Electrostatic discharges            | ISO10605(07/2008)         |
| Bulk current injection              | ISO11452-4(12/2011)       |
| Immunity to Radiated disturbances   | ISO11452-2(11/2004), ALSE |
| Emission radiated                   | CISPR25(03/2008), ALSE    |
| Immunity power line magnetic fields | ISO11452-8(06/2015)       |

## 7. Important notice

This datasheet and any information contained therein may not be reproduced in whole or in part without the prior permission from Sinomags. The content of this information may be changed without notice for purposes such as improvement. Make sure you have the latest information when using the current sensor.