

Current Sensor

Product Series: STK-616T

STK-616T-40GB

STK-616T-65GB

STK-616T-66GC

STK-616T-100GB


Part number: STK-616T-133GU

STK-616T-30GB

STK-616T-30GC

STK-616T-133GB

Version: Ver 4.2

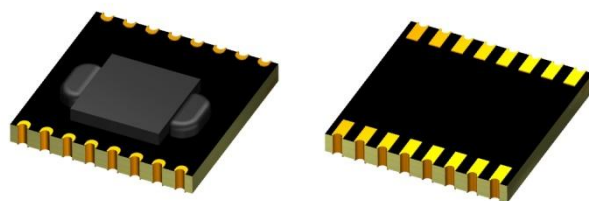

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current	4
4.	Functional Block Diagram	4
5.	Electrical data STK-616T-xxGB	5
6.	Electrical data STK-616T-xxGC	6
7.	Electrical data STK-616T-xxGU	7
8.	Dimension & Pin definitions without OCD function	8
9.	Dimension & Pin definitions with OCD function	9
10.	Pin definitions	10
13.	Step response time	12
14.	Power on delay	13
15.	Typical Application of STK-616T	14
16.	Examples of OCD function	15
17.	General information on OCD	16
18.	PACKAGE MATERIALS INFORMATION	18

1. Description

The STK-616T series current sensor is based on MR (magnetoresistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- AC/DC, DC/DC power supplies
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	℃	-40 ~ 125
Storage temperature	T_stg	℃	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	Vcc	V	6
ESD rating (HBM)	U_ESD	Kv	4
Junction temperature	T_J	℃	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter


Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	Ud	Kv	3.6	
Impulse withstand voltage 1.2/50μs	Ūw	Kv	6	
Clearance distance (pri. -sec)	Dci	mm	6	Determined by customer's layout
Creepage distance (pri. -sec)	dCp	mm	6	

Measuring current table


Product	Meas. Range I _{pn} (A)	Sensitivity (mV/A)	Vcc (V)	T (℃)
STK-616T-40GB-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125
STK-616T-65GB-1-2.5-E-2-C-N	±65A	30	5	-40 ~ 125
STK-616T-65GB-1-2.5-E-1-Z-N	±65A	30	5	-40 ~ 125
STK-616T-40GB-1-2.5-E-1-C-N	±40A	50	5	-40 ~ 125
STK-616T-133GU-0-0.5-X-X-X-N	+133A	19.8	3.3	-40 ~ 125
STK-616T-66GC-0-1.65-X-X-X-R	±66A	19.8	3.3	-40 ~ 125
STK-616T-100GB-1-2.5-E-2-C-R	±100A	20	5	-40 ~ 125
STK-616T-30GB-1-2.5-E-2-C-R	±30A	66.67	5	-40 ~ 125

STK-616T-30GC-0-1.65-X-X-X-N	±30A	44	3.3	-40 ~ 125
STK-616T-133GB-1-2.5-E-2-Z-R	±133A	15	5	-40 ~ 125


2. Part number definition

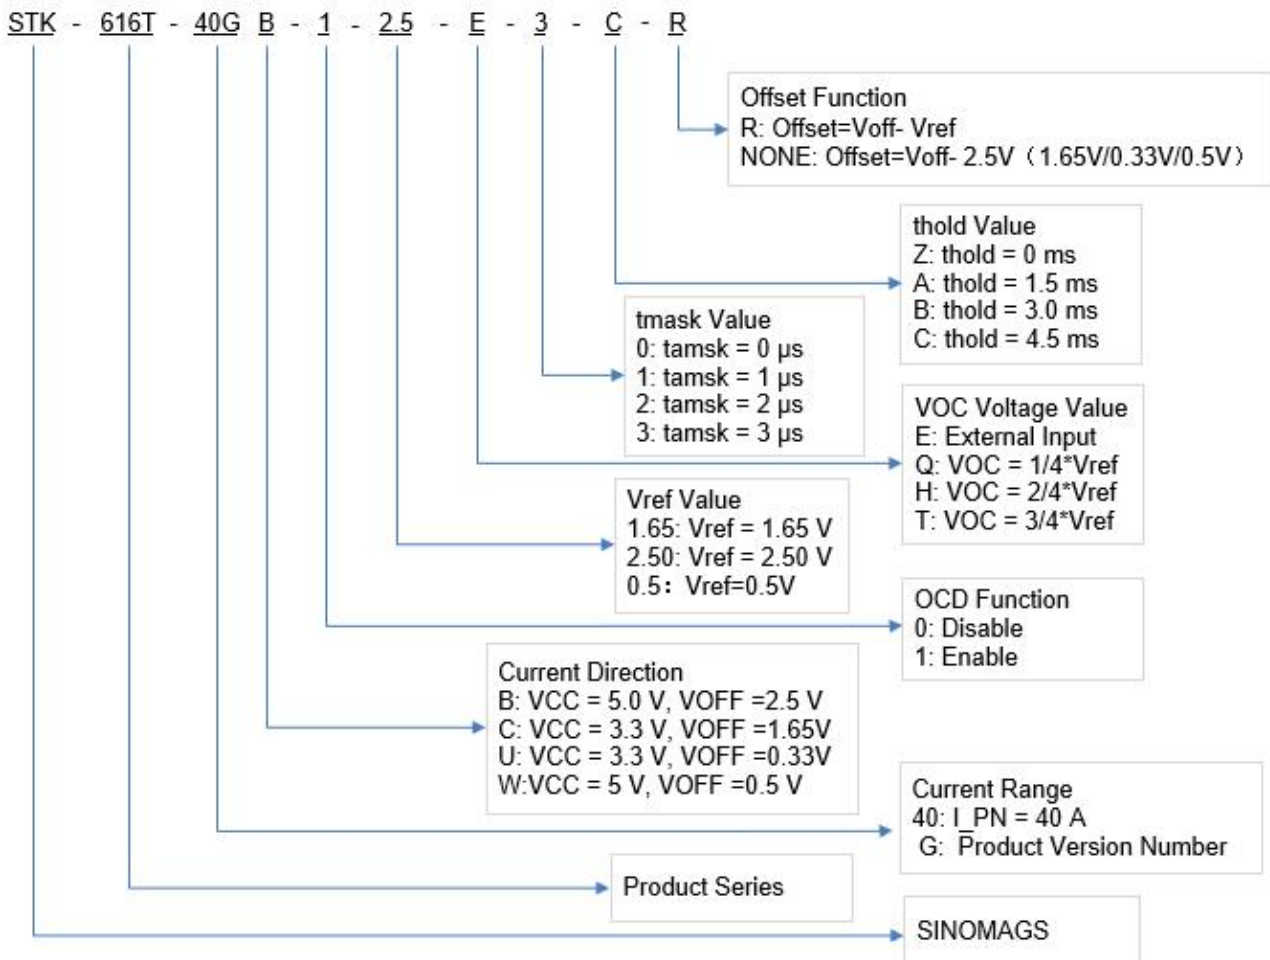

3. Temperature vs Current

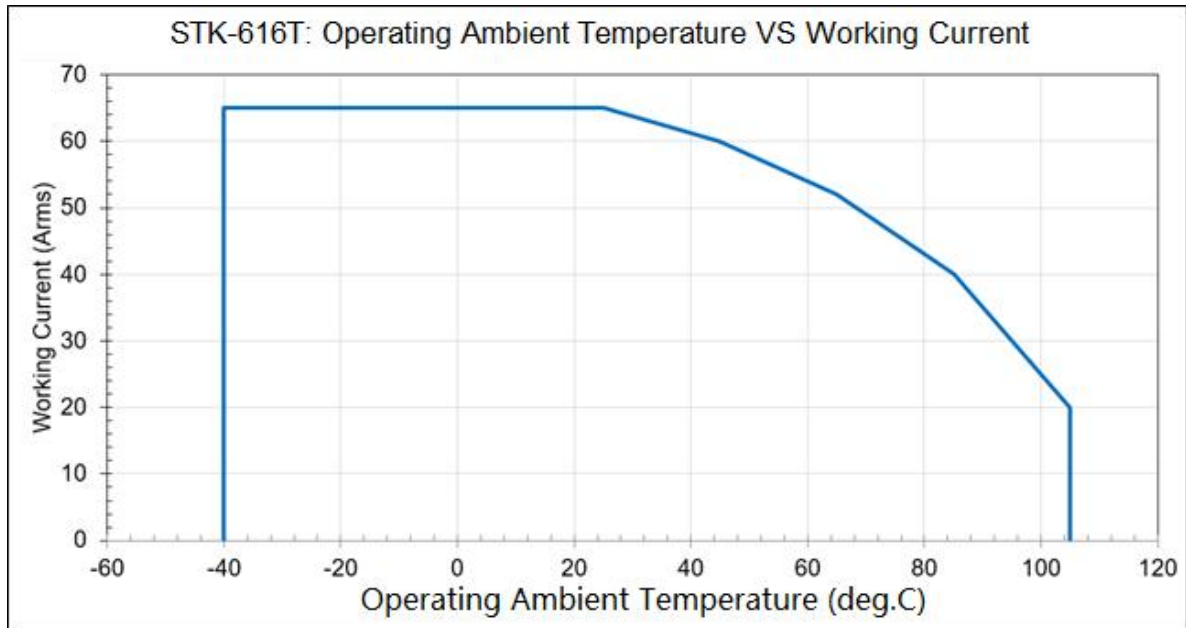

4. Functional Block Diagram

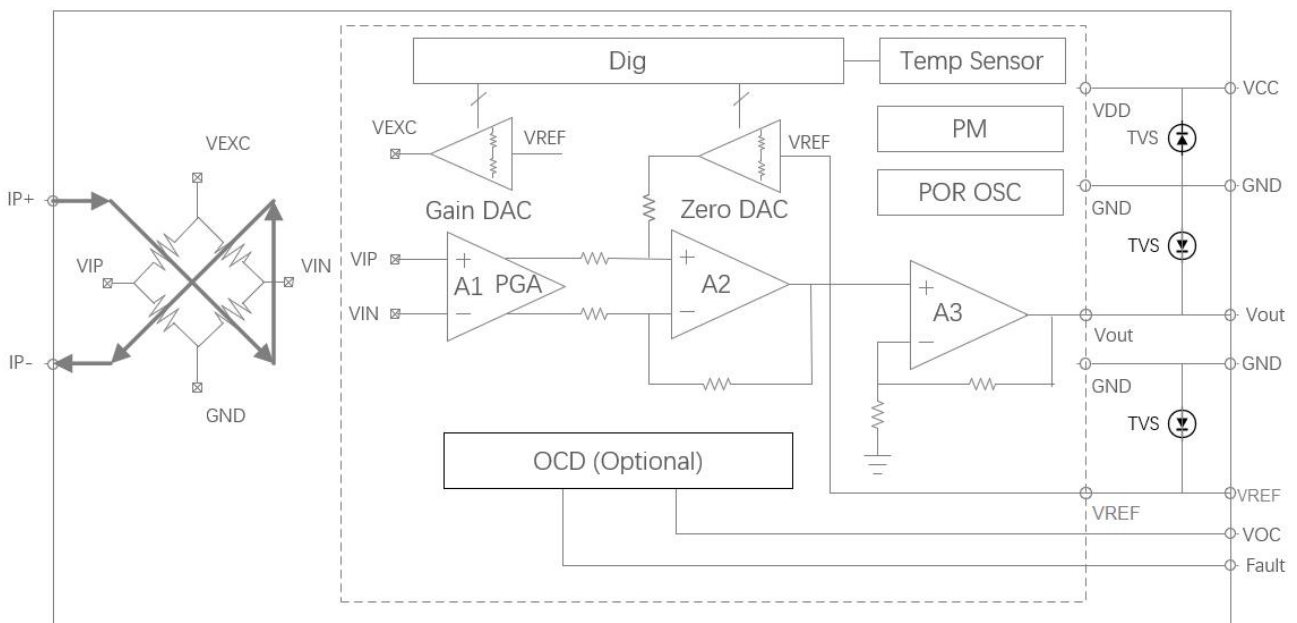

5. Electrical data STK-616T-xxGB

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I _{pn}	A	-40		40	STK-616T-40GB
			-65		65	STK-616T-65GB
			-100		100	STK-616T-100GB
			-30		30	STK-616T-30GB
			-133		133	STK-616T-133GB
Supply voltage	V _{cc}	V	4.5	5	5.5	
Current consumption	I _{cc}	mA		7	12	
Primary conductor resistance	R _{IP}	mΩ		0.4		
Quiescent voltage@0A	V _{off}	V	2.45	2.5	2.55	
Reference voltage	V _{ref}	V	2.45	2.5	2.55	
Electrical offset voltage	Offset	mV		±10		V _{off} - V _{ref}
Output Specifications	R _{out}	Ω	1		30	
	R _{ref}		1		80	
Theoretical gain	G _{th}	mV/A		50		STK-616T-40GB
				30		STK-616T-65GB
				20		STK-616T-100GB
				66.67		STK-616T-30GB
				15		STK-616T-133GB
OCD function (if applicable)						
OCD range	V _{OC}	V	0.5		3.3	
FAULT error		%		5%		% of OCD
OCD Hysteresis	I _{HYS}	%		10%		% of OCD
OCD Fault Mask	t _{mask}	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	T _{mask_error}	ns		125		
OCD Fault Hold Time	t _{hold}	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25℃	Non-L	%I _{pn}		±1.5		±I _{pn}
Step response time	t _{res}	μs		1.5		@90% of I _{pn}
Frequency bandwidth	BW	kHz		150		@-3dB
Output voltage noise	V _{noise}	mVpp		20		100 ~ 120 kHz @250 kHz S.R.
Accuracy @ 25℃	X	% I _{pn}		±1.5		@ 0.5*I _{pn}
Thermal drift of G _{th}	GAIN _T	% G _{th}	-1.5		1.5	@ -40~105℃ drift related to the value @25℃
Thermal drift of V _{off}	V _{off_T}	mV	-15		15	
Total Accuracy	X TRange	% I _{pn}	-3		3	

6. Electrical data STK-616T-xxGC

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_pn	A	-66		66	STK-616T-66GC
			-30		30	STK-616T-30GC
Supply voltage	Vcc	V	3.15	3.3	3.6	
Current consumption	Icc	mA		7	12	
Primary conductor resistance	R_IP	mΩ		0.4		
Quiescent voltage@0A	Voff	V	1.60	1.65	1.70	
Reference voltage	Vref	V	1.60	1.65	1.70	
Electrical offset voltage	Offset	mV		10		
Output resistance	Vout	Ω	1		30	
	Vref		1		80	
Theoretical gain	G_th	mV/A		19.8		STK-616T-66GC
				44		STK-616T-30GC
OCD function (if applicable)						
OCD range	VOC	V	0.3		1.6	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25℃	Non-L	%I_pn		±1.5		±I_pn
Step response time	t_res	μs		1.5		@90% of I_pn
Frequency bandwidth	BW	kHz		150		@-3dB
Output voltage noise	Vnoise	mVpp		20		100 ~ 120 kHz @250 kHz S.R.
Accuracy @ 25℃	X	% I_pn		±1.5		@ 0.5*I_pn
Thermal drift of G_th	GAIN_T	% G_th	-1.5		1.5	@ -40~105℃
Thermal drift of Voff	Voff_T	mV	-15		15	drift related to the
Total Accuracy	X_TRange	% I_pn	-3		3	value @25℃


7. Electrical data STK-616T-xxGU

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_{pn}	A	-5		133	STK-616T-133GU
Supply voltage	V_{CC}	V	3.15	3.3	3.45	
Current consumption	I_{CC}	mA		7	12	
Primary conductor resistance	R_{IP}	m Ω		0.4		
Quiescent voltage@0A	V_{off}	V	0.28	0.33	0.38	
Reference voltage	V_{ref}	V	0.45	0.5	0.55	
Electrical offset voltage	Offset	mV		0.17		$V_{off} - V_{ref}$
Output resistance	V_{out}	Ω	1		30	
	V_{ref}		1		80	
Theoretical gain	G_{th}	mV/A		19.8		STK-616T-133GU
OCD function (if applicable)						
OCD range	VOC	V	0.2		0.5	
FAULT error		%		5%		% of OCD
OCD Hysteresis	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs	0	1	3	0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25 $^{\circ}\text{C}$	Non-L	% I_{pn}		± 2.5		$\pm I_{pn}$
Step response time	t_res	μs		1.5		@90% of I_{pn}
Frequency bandwidth	BW	kHz		150		@-3dB
Output voltage noise	Vnoise	mVpp		20		100 ~ 120 kHz @250 kHz S.R.
Accuracy @ 25 $^{\circ}\text{C}$	X	% I_{pn}		± 2.5		@ 0.5* I_{pn}
Thermal drift of G_{th}	GAIN_T	% G_{th}	-1.5		1.5	@ -40~105 $^{\circ}\text{C}$ drift related to the value @25 $^{\circ}\text{C}$
Thermal drift of V_{off}	Voff_T	mV	-15		15	
Total Accuracy	X_TRange	% I_{pn}	-3.5		3.5	

<http://www.sinomags.com>

9. Dimension & Pin definitions with OCD function

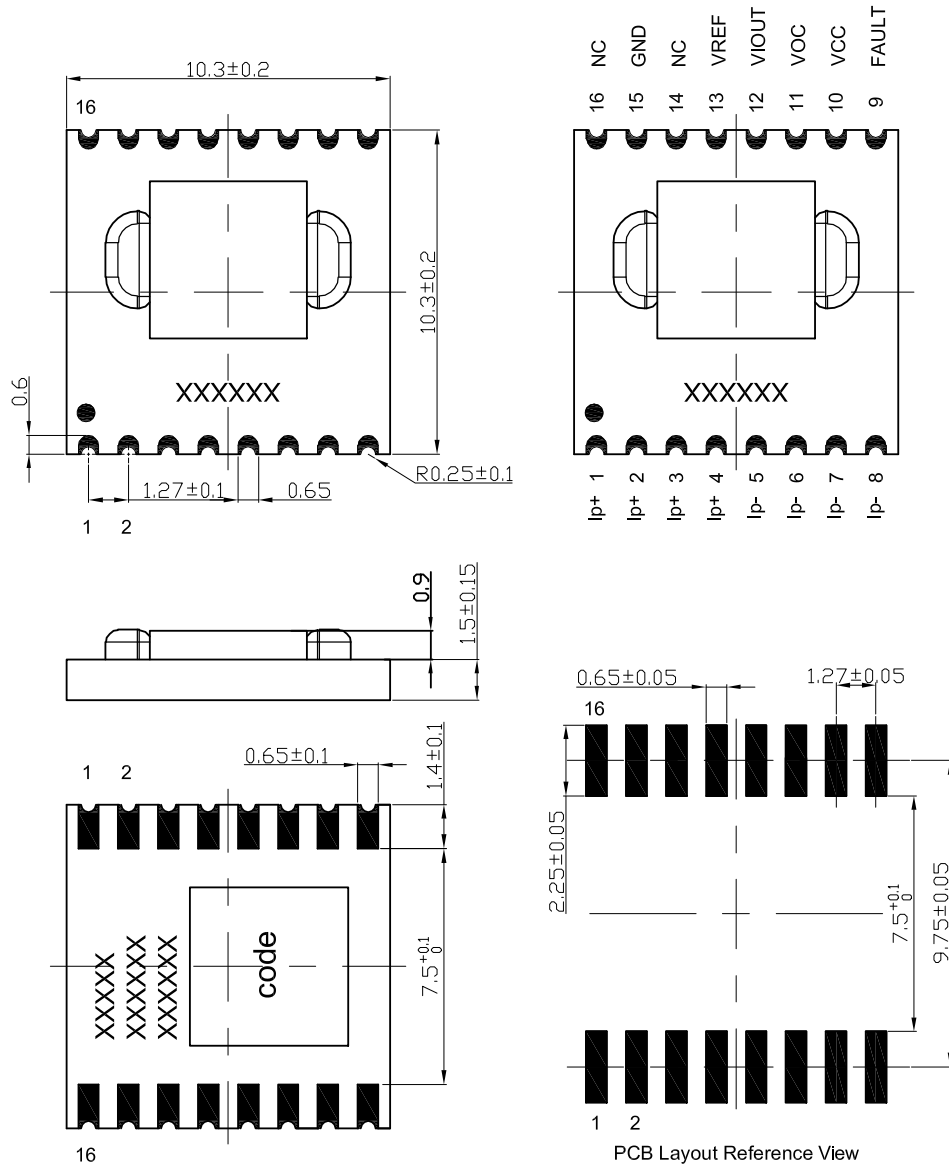

The mark of "TXXBN" on the top surface shows the information on the "Part number": "T" = "STK-616T", "XX" = "Product sensing range", "B" = "Current direction", "N" = Offset function.

10.Pin definitions


Pin definition for product without OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	NC	No connection, Internal use
10	VCC	Power supply pin
11	NC	No connection, Internal use
12	VIOOUT	Sensor output pin
13	Vref	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


Pin definition for product with OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level.
10	VCC	Power supply pin
11	VOC	Over current detection threshold input pin
12	VIOOUT	Sensor output pin
13	Vref	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


11.PCB layout recommendation

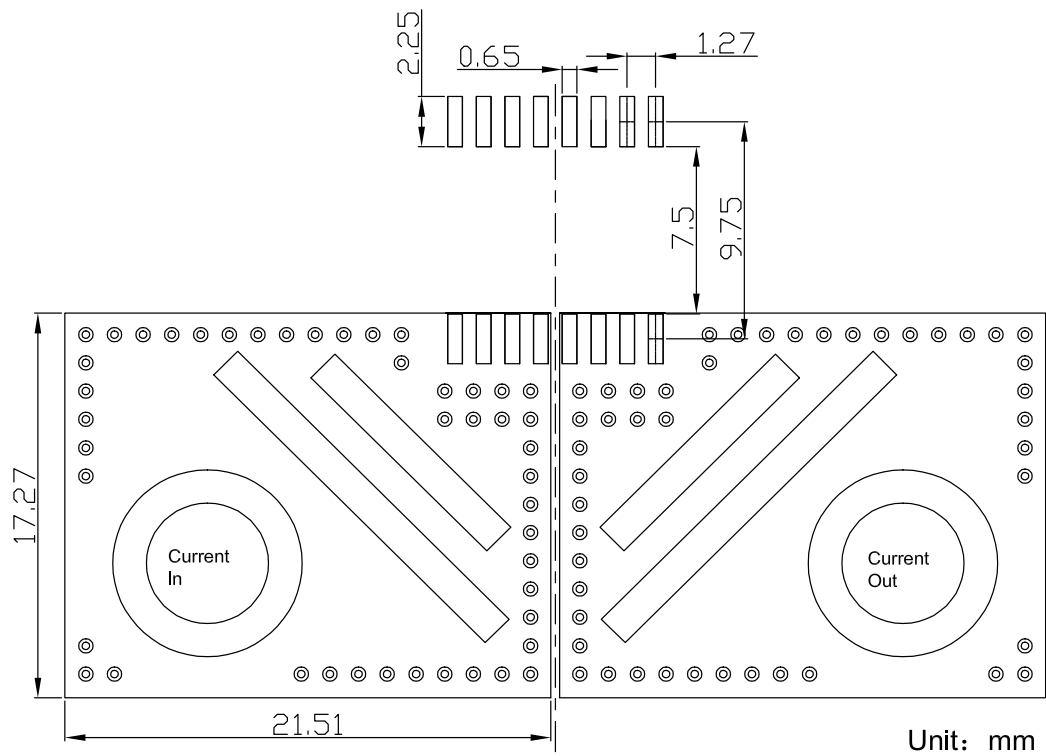

12. Frequency band width

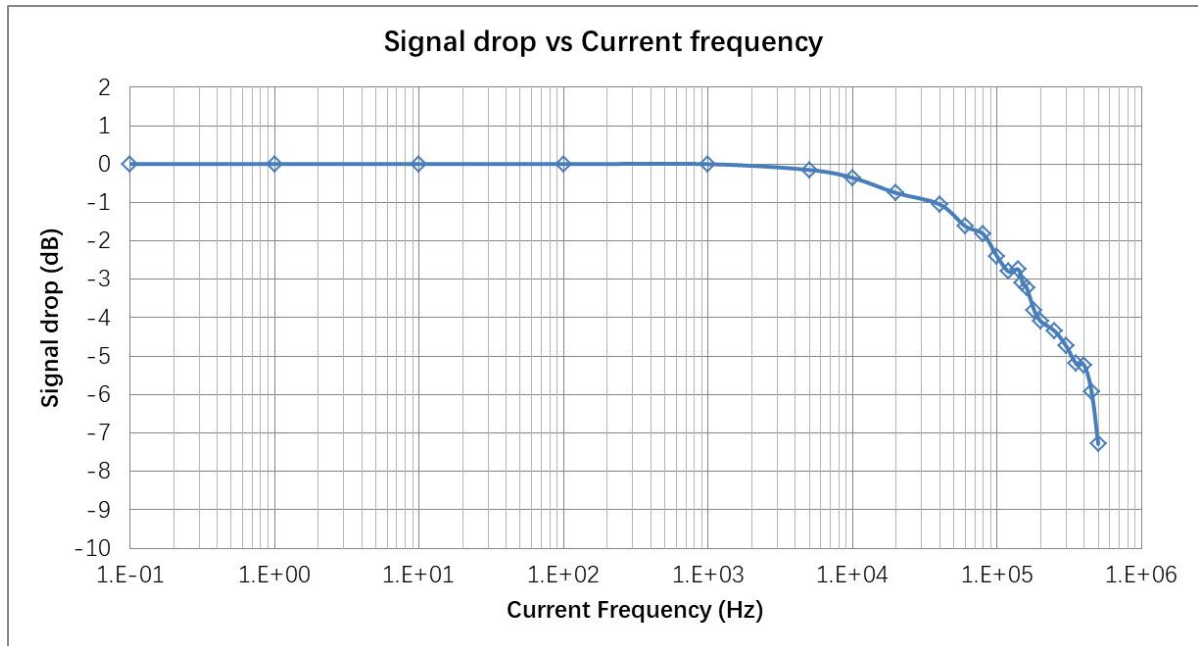


13. Step response time

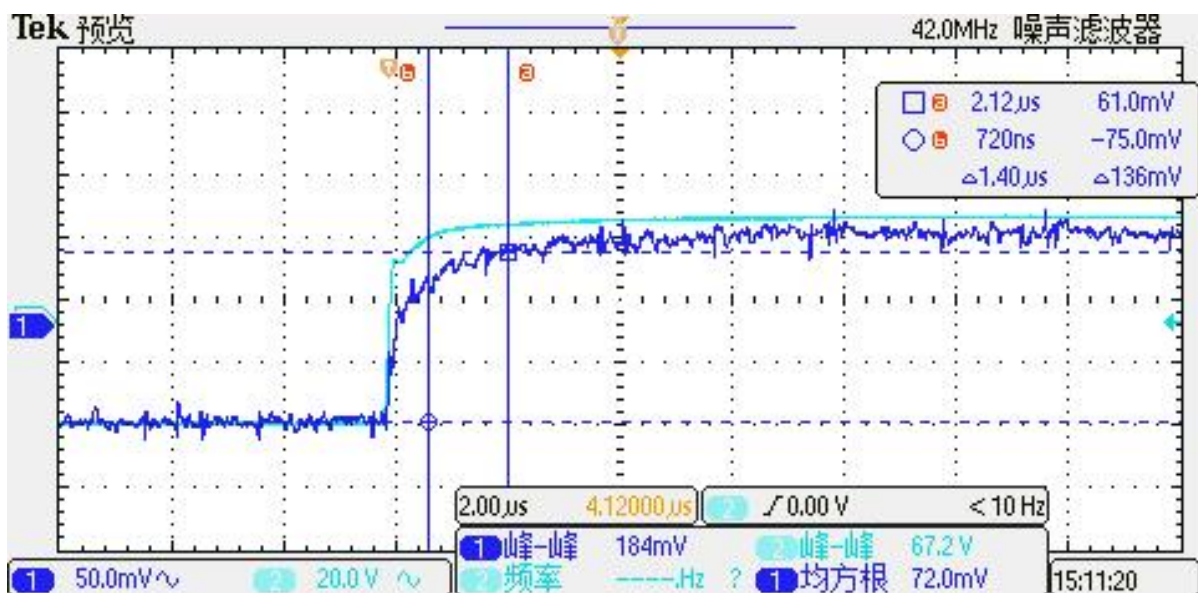


The typical frequency response of STK-616T current sensor. The response time from 90% of the primary current (pink) to 90% of the secondary output (blue) is 1.5 μs.

14.Power on delay

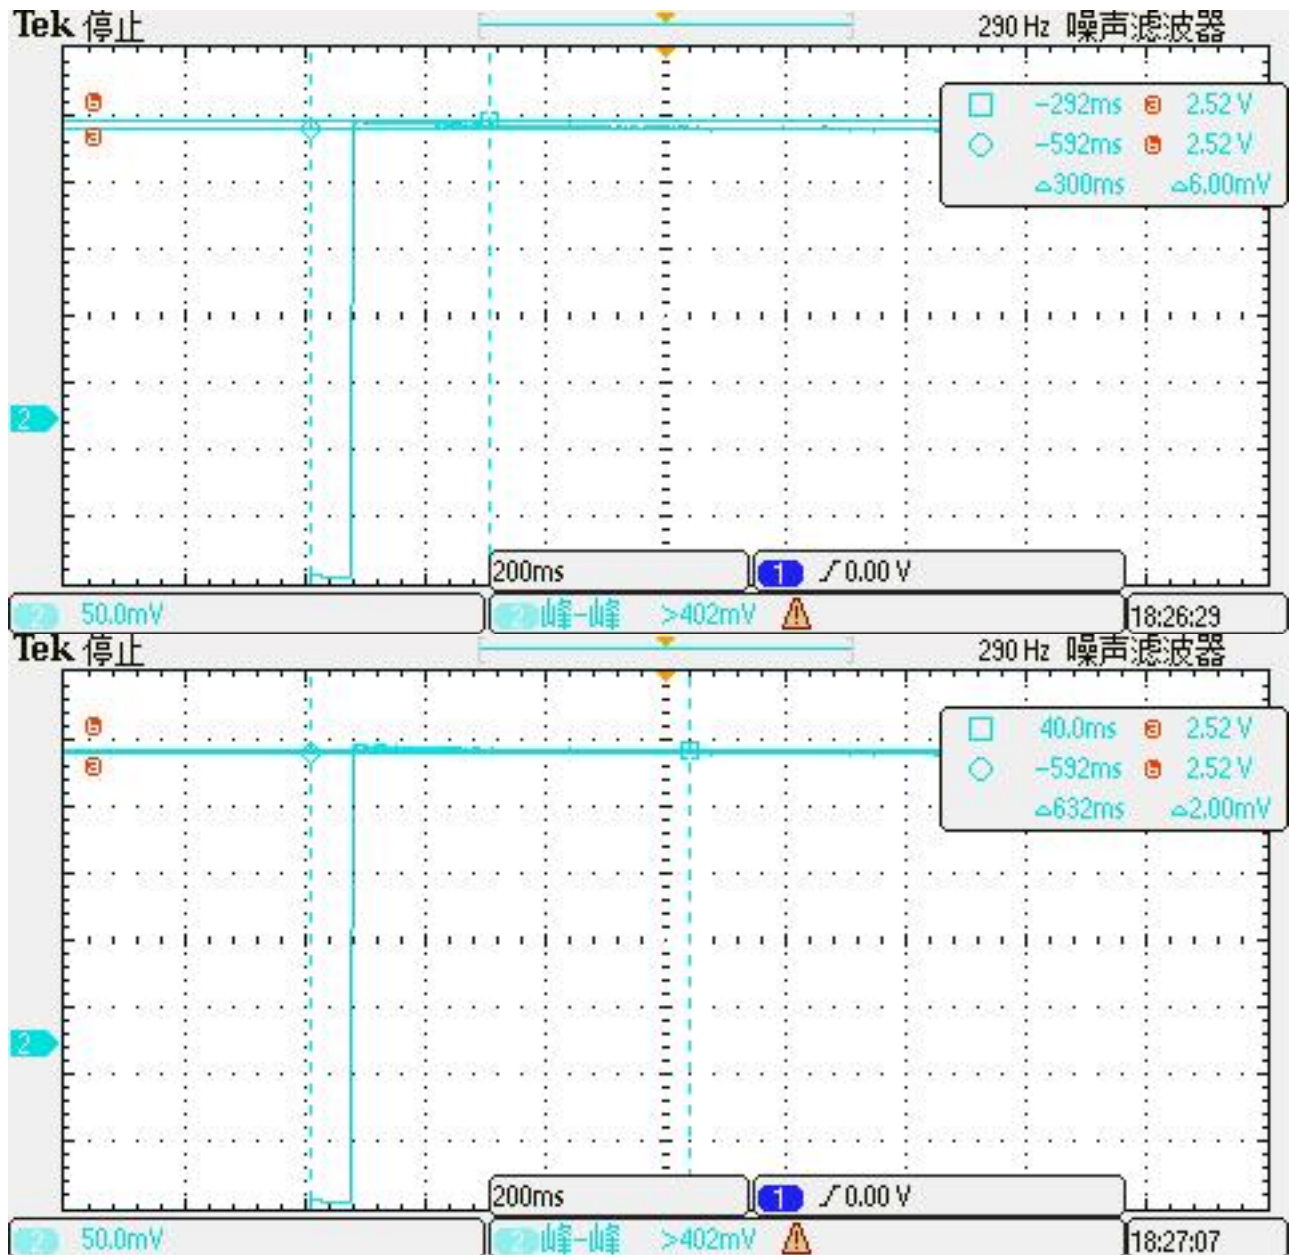

Typical power on delay of stk-616T current sensor. From 300ms to 630ms, the output difference is 4mV.

15. Typical Application of STK-616T

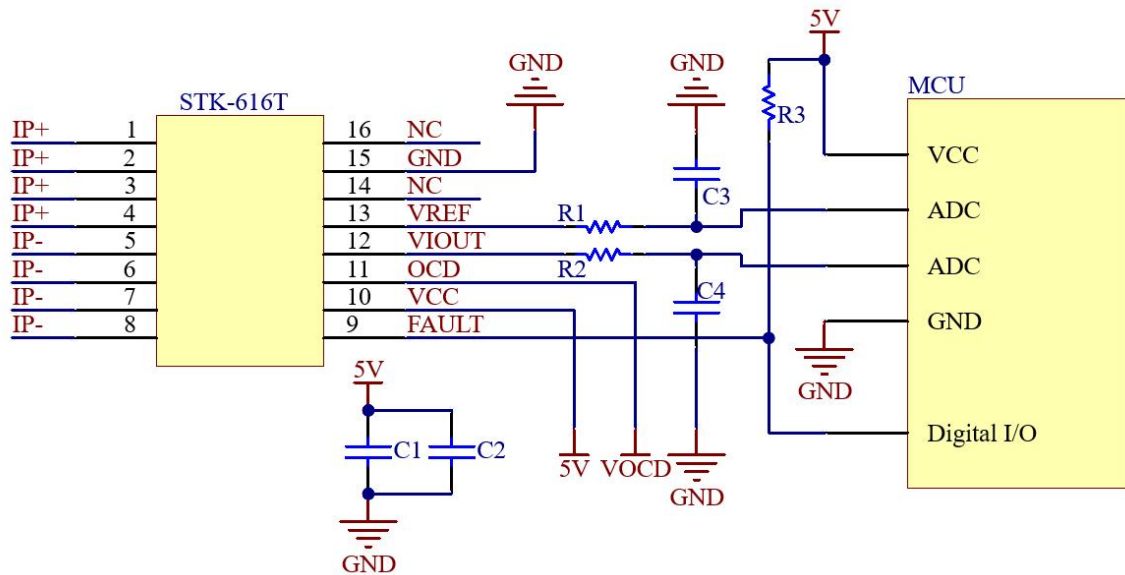


Remark: With below recommended setting, the response speed of the chip will be not affected:

R3 = 5 kΩ, C1 = 1 μf, C2 = 10 nf, C3 = C4 = 50 pf.


While, R2 and C4 constitute RC filter circuit. The relationship between RC value and frequency is shown in below Table

R2 (kohm)	C4 (nF)	Theoretical band width $f = 1/(2\pi RC)$ (kHz)	Measured band width (kHz)
1	1	150	~ 150
1	1.6	99	~ 100
1	16	9.9	~ 10

16.Examples of OCD function

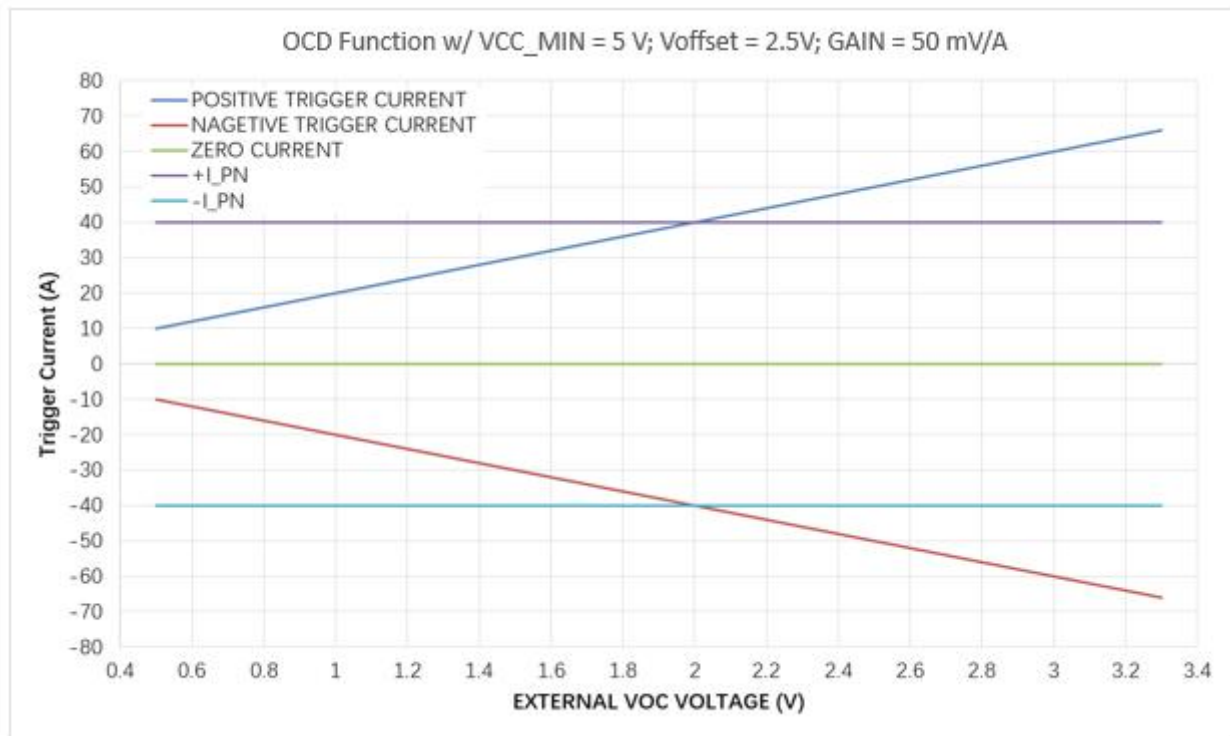

OCD function for STK-616T-40GB

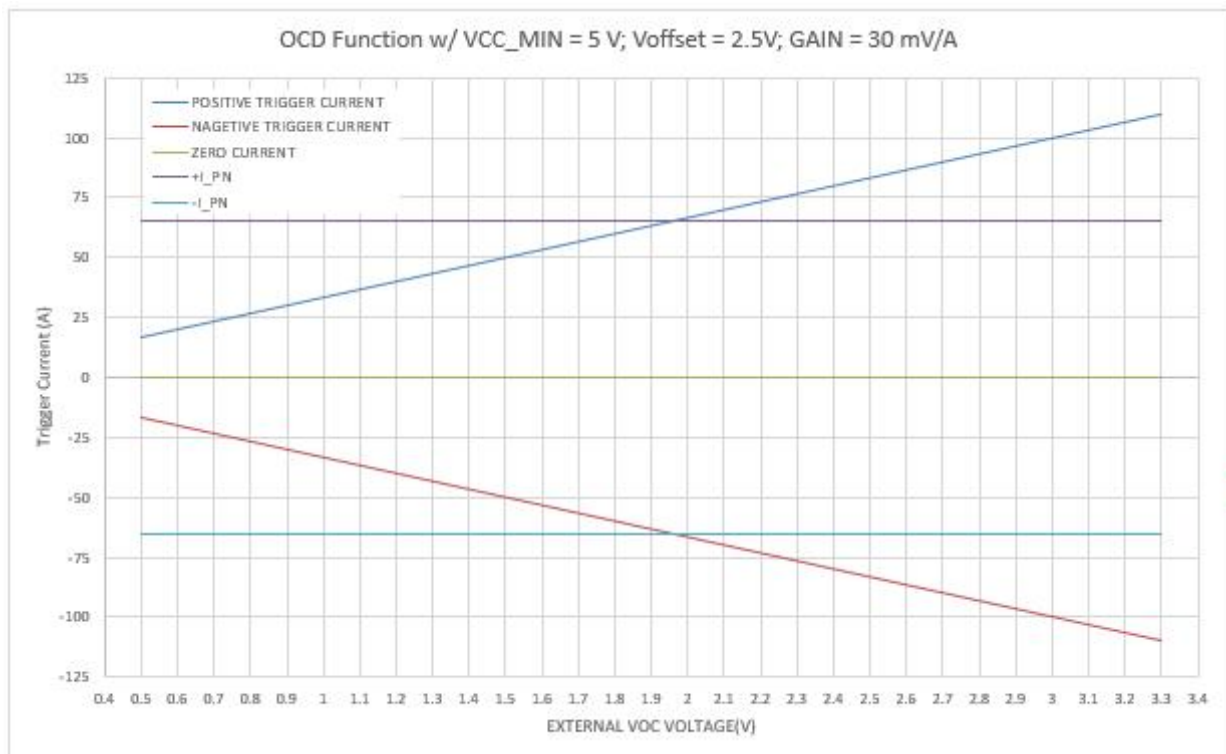


OCD function for STK-616T-65GB

17. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}$
 - ①. $0.5\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$;
- b) $V_{ref} = 1.65\text{ V}$
 - ①. $0.3\text{ V} \leq V_{OC} \leq V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm V_{OC}$;
 - ③. Trigger current = $(V_{ref} \pm V_{OC} - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5\text{ V}$
 - ①. $0.2\text{ V} \leq V_{OC} \leq 0.5\text{ V}$;
 - ②. Trigger voltage = $V_{ref} + 8 \cdot V_{OC}$;
 - ③. Trigger current = $(V_{ref} + V_{OC} - V_{off}) / G_{th}$

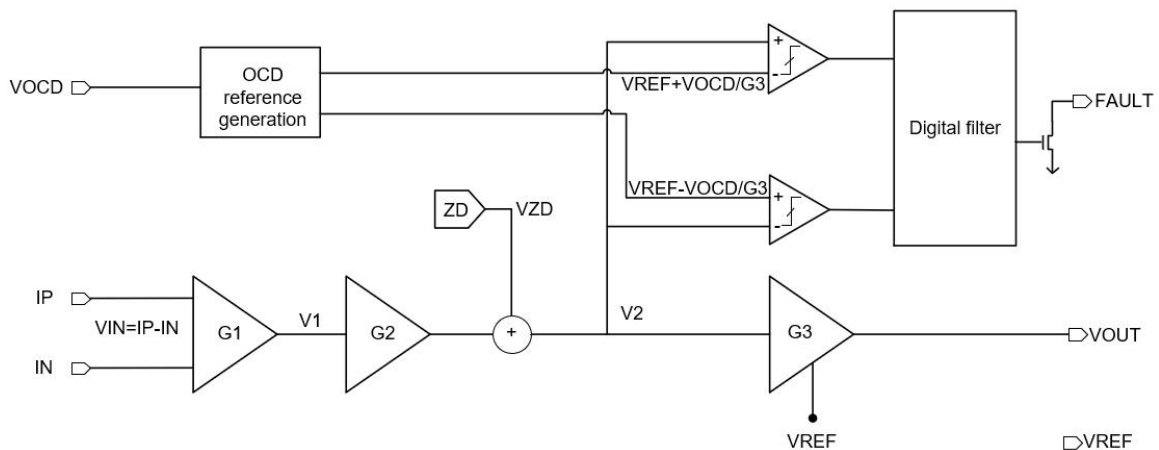


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

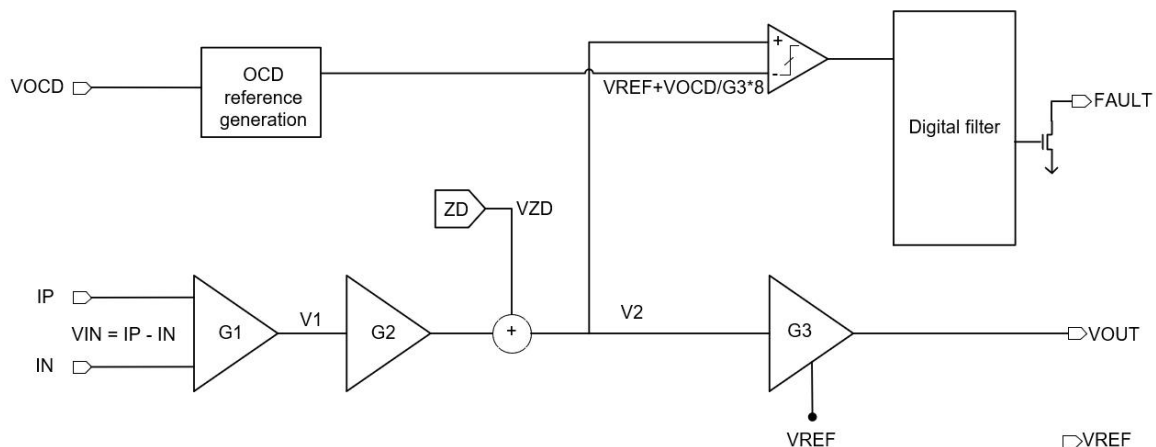


Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

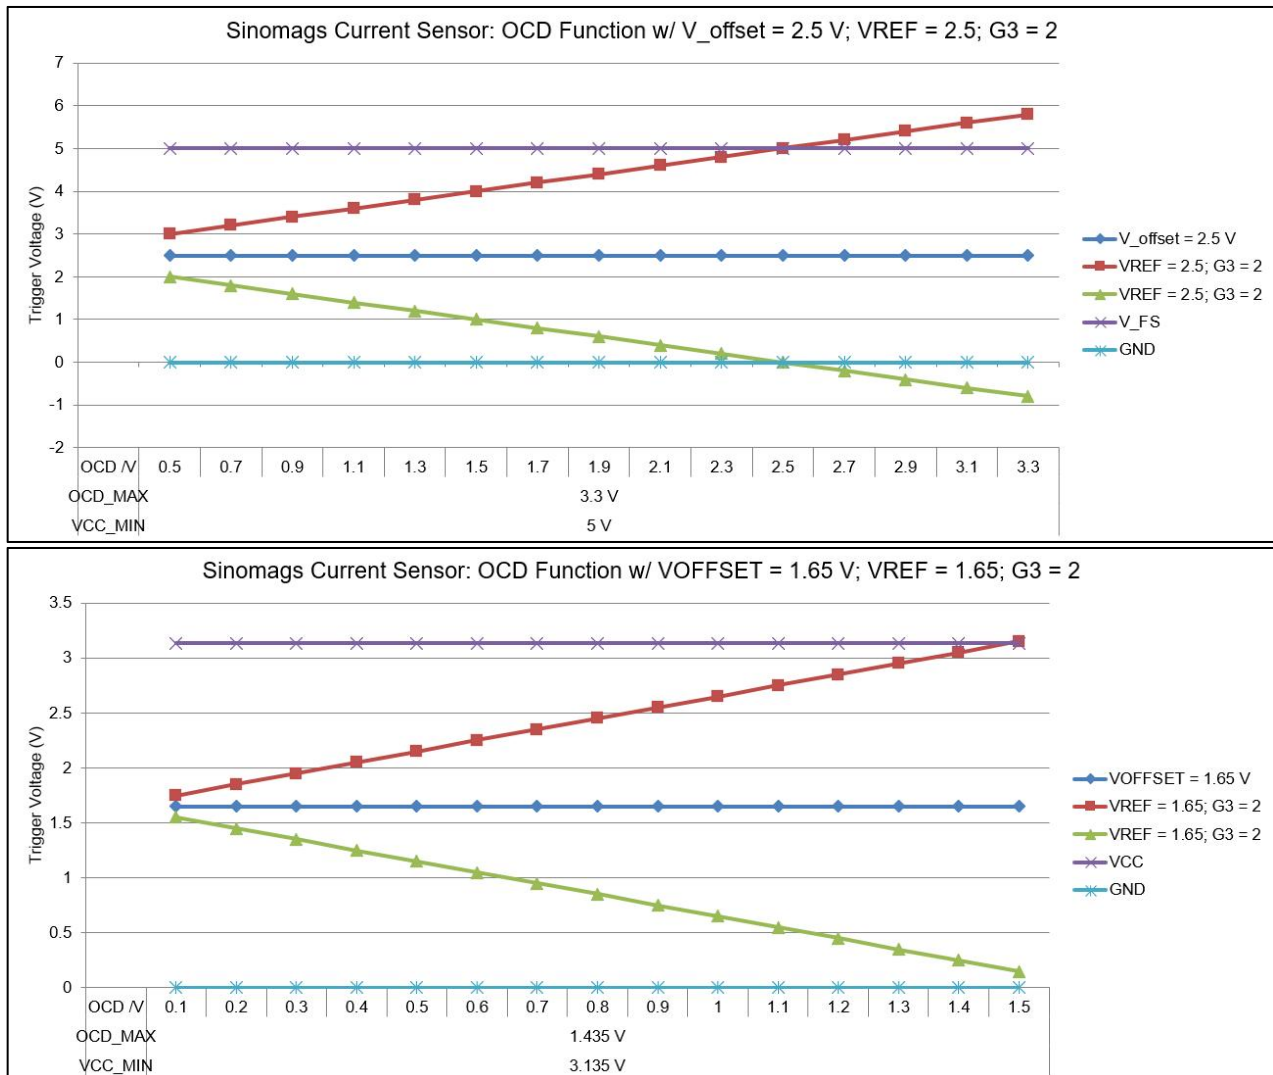

18. PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

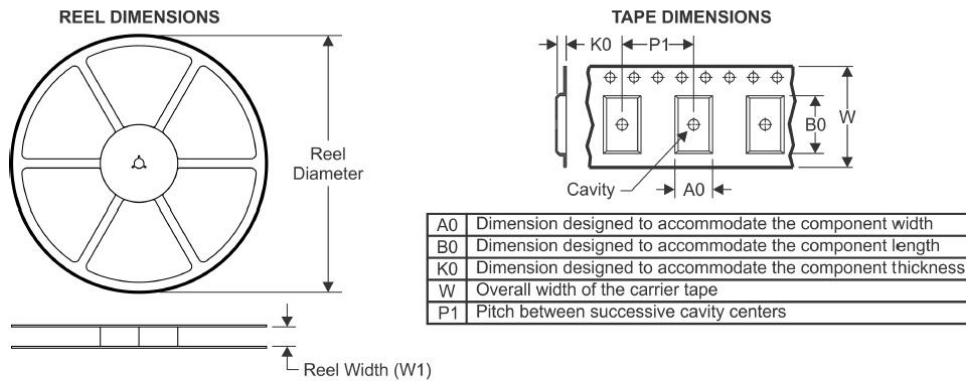

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

